

1. Design Module

Design workflow process document

ARCHITECTURE & INTERIOR DESIGN WORKFLOW PROCESS

1. Project Initiation

1.1 Client Inquiry

- Initial contact through meeting, call, or email.
- Understand client requirements, budget, timeline, and project scope.
- Schedule site visit and consultation.

1.2 Proposal & Agreement

- Prepare a fee proposal and scope of services.
- Discuss project deliverables and timelines.
- Sign contract and receive advance payment.

2. Site Analysis & Data Collection

2.1 Site Visit

- Measure existing conditions.
- Document site through photographs and videos.
- Identify opportunities and constraints.

2.2 Research & Analysis

- Gather client references and inspiration.

3. Concept Design Phase

3.1 Design Brief Development

- Define project goals and design direction.
- Establish functional requirements.

3.2 Concept Generation

- Mood boards.
- Material and color palettes.
- Preliminary sketches and space planning.

3.3 Client Presentation

- Present concept options.
- Collect client feedback.
- Finalize design direction.

4. Schematic Design

4.1 Space Planning

- Develop floor plans.
- Furniture layout.
- Zoning and circulation planning.

4.2 Design Development

- Elevations and sections.
- Conceptual 3D views.
- Preliminary material selections.

4.3 Review & Approval

- Internal design review.
- Client approval before moving to detailed design.

5. Detailed Design Development

5.1 Technical Drawings

- Detailed floor plans.
- Elevations and sections.
- Ceiling plans.
- Flooring layouts.

5.2 Interior Details

- Joinery drawings.
- Furniture details.
- Wall treatments and finishes.
- Lighting design.

5.3 Coordination

- Structural consultant coordination.
- MEP (Mechanical, Electrical, Plumbing) coordination.
- Vendor consultations.

6. Visualization & Presentation

6.1 3D Modeling

- Develop a detailed 3D model.
- Material and lighting application.

6.2 Rendering

- Photorealistic interior/exterior renders.
- Walkthrough views if required.

6.3 Final Client Approval

- Present final design package.
- Incorporate final revisions.

7. Construction Documentation

7.1 Working Drawings

- Issue construction drawings.
- Dimensioned plans and details.
- Material specifications.

7.2 BOQ Preparation

- Bill of Quantities.
- Material schedules.
- Cost estimation.

8. Execution Phase

8.1 Site Supervision

- Periodic site visits.
- Quality control inspections.

9. Project Handover

9.1 Final Inspection

- Snag list preparation.
- Rectification verification.

10. Post-Completion Support

10.1 Defect Liability Review

- Monitor project performance.
- Address post-completion concerns.

Required Clarifications

Please confirm:

- **Design stages followed within your organization**

(refer the work flow process explained above)

- **Approval hierarchy for design submissions**

Intern —> Junior Architect —> Senior Architect —> Principal Architect

- **Number of design revisions allowed**
- **Design status workflow**

(refer the work flow process explained above)

2. DESIGN REVIEW MODULE

Required Documents

Please provide:

- **Design Review Checklist**

Item	Yes	No	Comments
Client requirements have been addressed	☐	☐	
Design aligns with approved concept/theme	☐	☐	
Space planning is functional and efficient	☐	☐	
Circulation and movement paths are clear	☐	☐	
Furniture layout is practical	☐	☐	
Material selections are approved	☐	☐	
Colour palette is consistent	☐	☐	

Lighting design is adequate for the space	☐	☐	
Ceiling design coordinated with lighting & HVAC	☐	☐	
Dimensions have been checked	☐	☐	
Architectural, Structural & MEP drawings coordinated	☐	☐	
Accessibility requirements considered	☐	☐	
Safety requirements considered	☐	☐	
Material specifications are complete	☐	☐	
Drawings follow office standards	☐	☐	
Sheet numbers and titles are correct	☐	☐	
Renderers match drawings and specifications	☐	☐	

• Design Comments Format

Comment No.	Drawing/Sheet Ref	Comment	Raised By	Date	Status
DC-001	Furniture Layout	Shift reception desk 600mm left	Client	24-Jun-26	Open
DC-002	Ceiling Plan	Add cove lighting in dining area	Design Head	24-Jun-26	Closed
DC-003	Render View 03	Change wall finish to green wainscoting	Client	24-Jun-26	In Progress

• Design Change Request Format

Field	Details
DCR No.	DCR-001
Project Name	XYZ Restaurant
Date	24-Jun-26
Requested By	Client
Design Stage	Detailed Design
Description of Change	Replace marble flooring with terrazzo flooring
Reason for Change	Budget optimization
Impact on Cost	+₹50,000
Impact on Schedule	+3 Days
Reviewed By	Project Architect
Approved By	Design Head / Client
Status	Approved

Required Clarifications

Please confirm:


• Internal design review process

- The designer prepares drawings/models/renders.
- Project Architect reviews design for functionality, aesthetics, and compliance.
- Design Head/Principal Architect reviews overall design intent.
- Comments are issued to the design team.
- Revisions are completed and resubmitted.
- Final internal approval is obtained before client submission.

• Client review process

- The design package is presented to the client.
- Client reviews drawings, renders, and material selections.
- Client comments and feedback are documented.
- The design team evaluates requested changes.
- Revised design is submitted for review.
- Client provides approval to proceed to the next stage.

• Comment and feedback management workflow

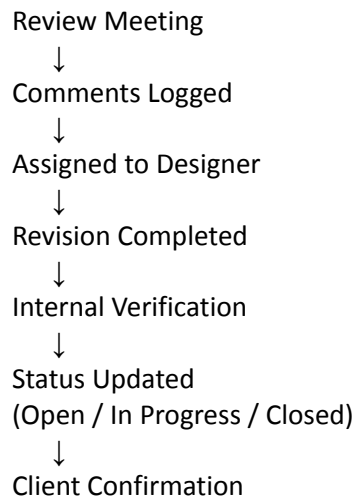

• Design revision approval procedure

- Review comments are received from the internal review team or client.
- The Design Team evaluates the comments and identifies the required revisions.
- Revisions are incorporated into the drawings, models, and related documents.
- All revised items are highlighted and recorded in the Design Comment Register.
- The revised design package is submitted for internal review.
- The Project Architect verifies that all comments have been addressed.
- Major design changes affecting scope, cost, timeline, or functionality are reviewed by the Design Head/Principal Architect.
- The revised design package is submitted to the client for approval, if required.

- Upon approval, the revision is assigned a revision number and the document status is updated.
- Approved revisions become the latest controlled version of the design.

• Who is authorized to approve designs?

Principal Architect

• Approval stages involved in the process

- Internal Design Review
- Internal Design Approval
- Client Review
- Client Approval
- Detailed Design Approval
- Construction Drawing Approval
- Issue for Construction (IFC)

• Approval remarks/comments format

Comment No.	Drawing Ref	Comment	Action Required	Status
DC-001	Floor Plan	Revise seating layout	Update drawing	Open
DC-002	Ceiling Plan	Add cove lighting	Approved	Closed

• Final sign-off procedure

1. All design comments are closed.
2. Final drawings and documents are reviewed internally.
3. Client approval is received.
4. Design Head/Principal Architect provides final authorization.

5. Drawings are marked "Approved" or "Issued for Construction (IFC)".
6. The final document package is archived and issued to the project team.

3. BOQ (BILL OF QUANTITIES) MODULE

Required Documents

Please provide:

- Existing BOQ Excel Sheet

PFA for reference

- BOQ PDF Sample

PFA for reference

- Measurement Sheet Sample

Item No.	Description	Location	Length (m)	Width (m)	Height (m)	Qty	Unit	Remarks
1	Floor Tiling	Dining Area	8.00	6.00	-	48.00	Sq. m	Main flooring
2	Wall Painting	Dining Area	8.00	-	3.00	24.00	Sq. m	One wall
3	Gypsum Ceiling	Dining Area	8.00	6.00	-	48.00	Sq. m	False ceiling
4	Skirting	Dining Area	28.00	-	0.10	28.00	Rmt	Perimeter
5	Wallpaper	Feature Wall	5.00	-	3.00	15.00	Sq. m	Accent wall

- Pricing Calculation Sheet

Required Clarifications

Please confirm:

- **Whether BOQ is maintained Room-wise or Category-wise**

First in general for false ceiling,paint etc (refer boq) then room wise for curtains,carpentry,doors,decor (refer boq)

- **Mandatory columns required in the BOQ**

Quantity,Rate per Quantity, Length and height, Area, Amount

- **Tax calculation rules**

18% gst

- **Discount calculation rules**

Percentage basis

- **Approval requirements before BOQ finalization**

- BOQ quantities shall be verified against approved drawings.
- Material specifications shall be reviewed and confirmed by the design team.
- Unit rates shall be validated based on approved vendor quotations or market rates.
- Cost calculations, taxes, and discounts shall be checked for accuracy.
- BOQ shall be reviewed by the Project Architect/Project Manager.
- Client approval shall be obtained before issuing the final BOQ.
- Only approved BOQs shall be issued for tendering or procurement.

- **Tax summary presentation requirements**

Description	Amount
Subtotal (Before Tax)	₹
Discount (If Applicable)	₹

Taxable Amount	₹
GST (%)	₹
Other Taxes (If Applicable)	₹
Grand Total (Including Taxes)	₹

- **Approval and signature block requirements**

Role	Name	Signature	Date
Prepared By			
Reviewed By			
Approved By			
Client Approval (if applicable)			

4. MATERIAL SHEET MODULE

Required Documents

- **Material Sheet (Master Creation)**

https://docs.google.com/spreadsheets/d/1f_qiHnkfiBNv-To0mn-S5-NBrBKpe4gwQbliIdn4F88/edit?usp=sharing

5. VENDOR SHEET MODULE

Required Documents

- **Vendor Master Sheet**

Vendor ID	Vendor Name	Category	Contact Person	Phone	Email	Location	GST No.	Remarks
V001	ABC Furniturer	Furniture	John Doe	9876543210	abc@email.com	Chennai	XXXXXXX	Preferred Vendor
V002	XYZ Lighting	Lighting	Jane Smith	9876543211	xyz@email.com	Chennai	XXXXXXX	Approved Vendor

- **Vendor Quotation Sample**

PFA for At the end of document

Required Clarifications

- **Is quotation comparison required?**

Yes

- **How are vendor payments tracked?**

Need to develop